




S6A THRU S6M

SURFACE MOUNT GENERAL RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 6.0 Amperes

DO-214AB/SMC

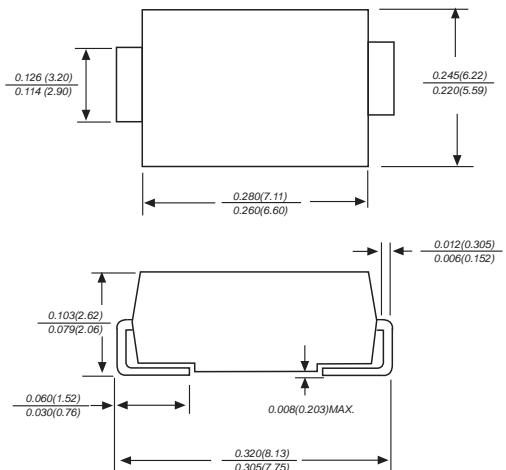

Dimensions in inches and (millimeters)

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.007 ounce, 0.25grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| XXW Catalog Number | SYMBOLS | S6A | S6B | S6D | S6G | S6J | S6K | S6M | UNITS |
|-----------------------------------------------------------------------------------------------------|---------------------|-----|-----|-----|-----|-----|-----|------|-------|
| Maximum repetitive peak reverse voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | VOLTS |
| Maximum RMS voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | VOLTS |
| Maximum DC blocking voltage | V _{Dc} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | VOLTS |
| Maximum average forward rectified current at TL=75°C | I _(AV) | | | | | | | | Amps |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I _{FSM} | | | | | | | | Amps |
| Maximum instantaneous forward voltage at 6.0A | V _F | | | | | | | | Volts |
| Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C | I _R | | | | | | | | µA |
| Typical junction capacitance (NOTE 1) | C _J | | | | | | | | pF |
| Typical thermal resistance (NOTE 2) | R _{θJA} | | | | | | | | °C/W |
| Operating junction and storage temperature range | T _{J,Tstg} | | | | | | | | °C |

*Pulse test: Pulse width 200 µsec, Duty cycle 2%


Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7.



烜芯微
XUANXINWEI


RATINGS AND CHARACTERISTIC CURVES S6A THRU S6M

Figure 1
Typical Forward Characteristics

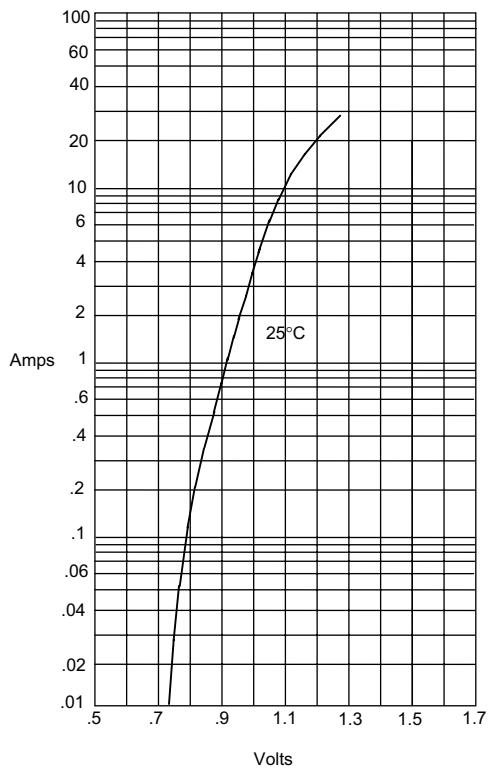


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

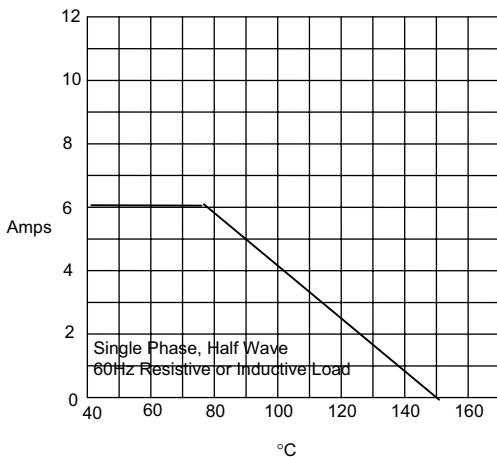

Average Forward Rectified Current - Amperes versus
Case Temperature - °C


Figure 3
Junction Capacitance

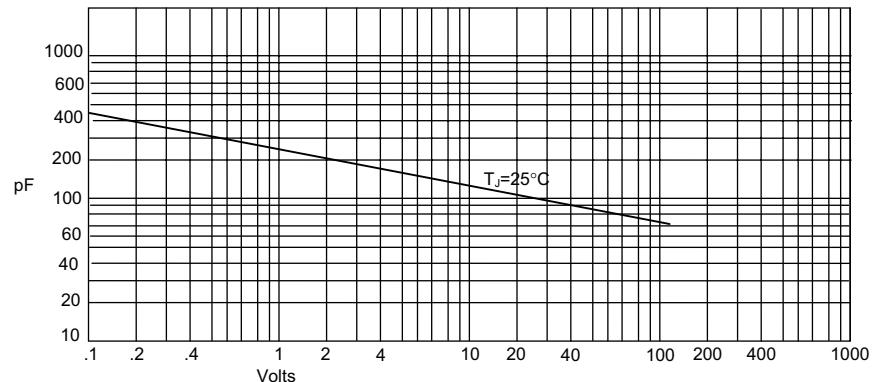


Junction Capacitance - pF versus
Reverse Voltage - Volts

RATINGS AND CHARACTERISTIC CURVES S6A THRU S6M

Figure 4
Typical Reverse Characteristics

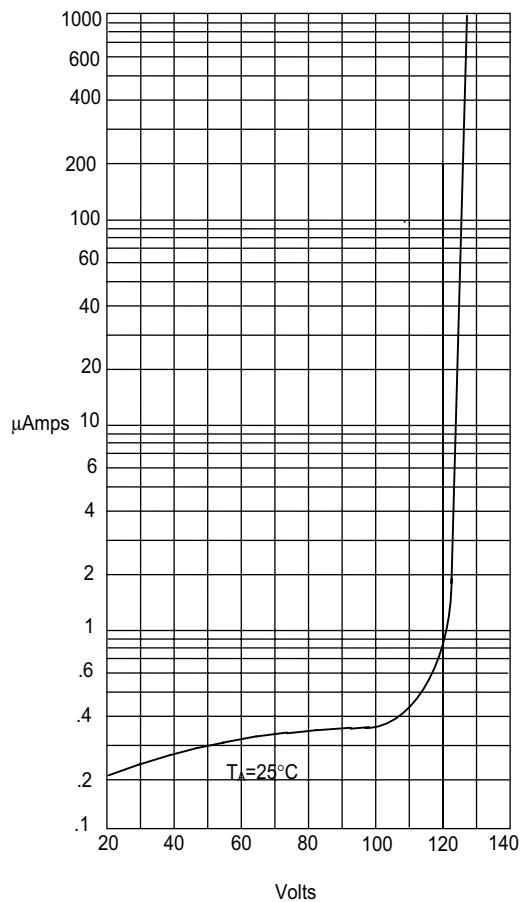

Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

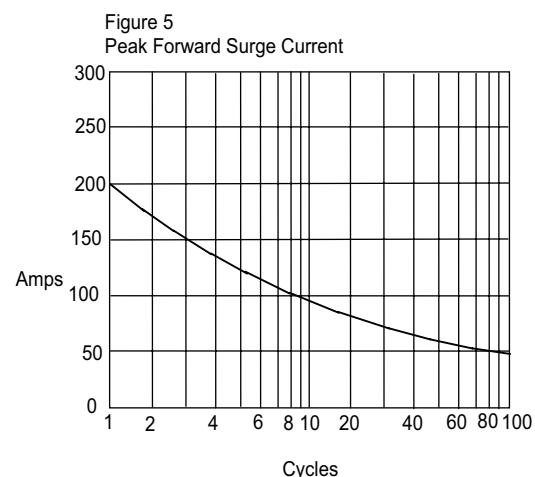

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles