

SILICON BRIDGE RECTIFIERS

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length, 5
lbs. (2.3kg) tension

Mechanical Data


Case : JEDEC KBL Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.22ounce , 6.21 grams

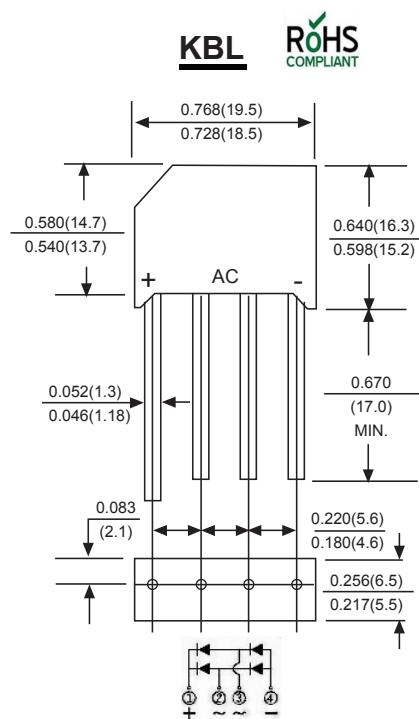

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| Parameter | SYMBOLS | KBL6005 | KBL601 | KBL602 | KBL604 | KBL606 | KBL608 | KBL610 | UNITS |
|---|-------------------|---------|--------|--------|-------------|--------|--------|--------|-------|
| Marking Code | | | | | | | | | |
| Maximum repetitive peak reverse voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward output rectified current at T _c =50°C (Note 2) T _A =50°C (Note 3) | I _(AV) | | | | 6.0 | | | | A |
| | | | | | 3.8 | | | | |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I _{FSM} | | | | 125 | | | | A |
| Maximum instantaneous forward voltage drop per bridge element at 6.0A | V _F | | | | 1.1 | | | | V |
| Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C | I _R | | | | 10 | | | | µA |
| | | | | | 1.0 | | | | mA |
| Typical Junction Capacitance (Note 1) | C _J | | | | 105 | | | | pF |
| Typical Thermal Resistance (Note 2) | R _{θJA} | | | | 20 | | | | °C/W |
| Operating junction temperature range | T _J | | | | -55 to +150 | | | | °C |
| storage temperature range | T _{STG} | | | | -55 to +150 | | | | °C |

NOTES:


1.Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.

2.Unit mounted on 3.0" x 3.0" x 0.11" thick(7.5x7.5x0.3cm) Al. plate.


3.P.C.Board mounted with 0.5" x 0.5" (12x12mm) copper pads,0.375" (9.5mm) lead length.

Ratings And Characteristic Curves


AVERAGE FORWARD RECTIFIED CURRENT,

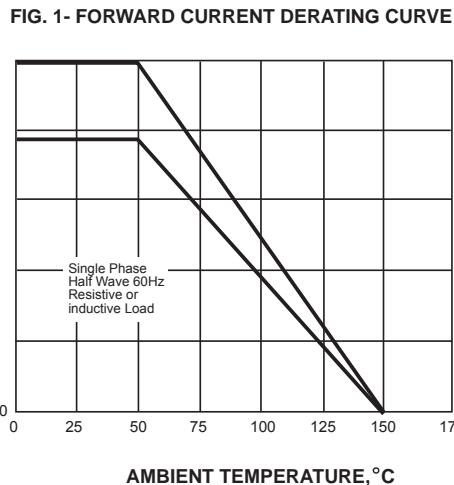


PEAK FORWARD SURGE CURRENT,
AMPERES

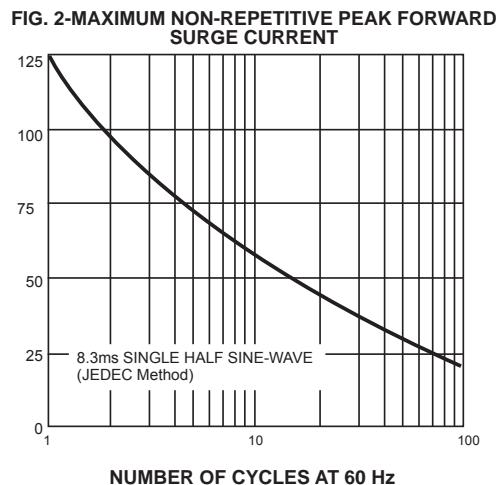


INSTANTANEOUS FORWARD
CURRENT,AMPERES

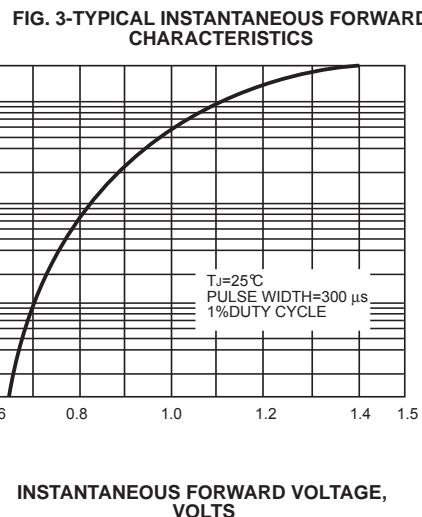


INSTANTANEOUS REVERSE CURRENT,
MICROAMPERES

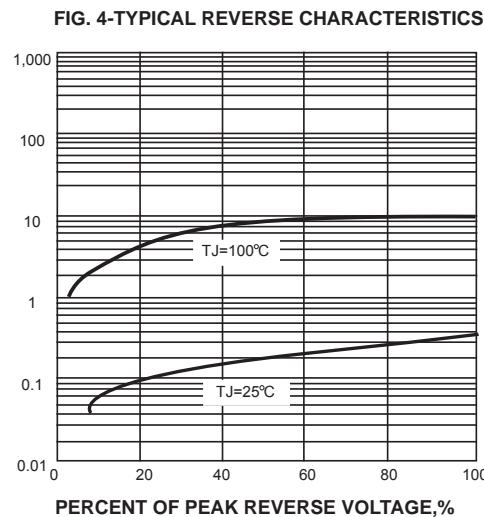

JUNCTION CAPACITANCE, pF

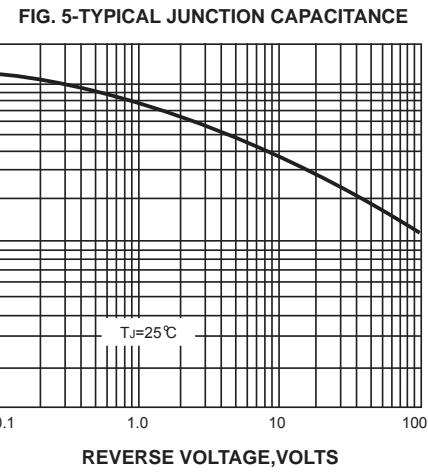

TRANSIENT THERMAL IMPEDANCE,
°C/W

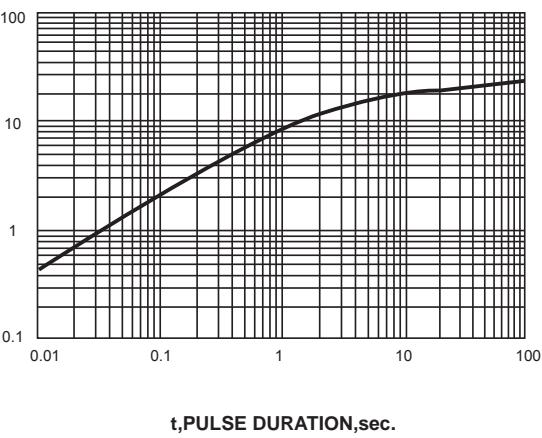

The curve above is for reference only.