


## Three-Terminal Positive Voltage Regulator

### 78L09

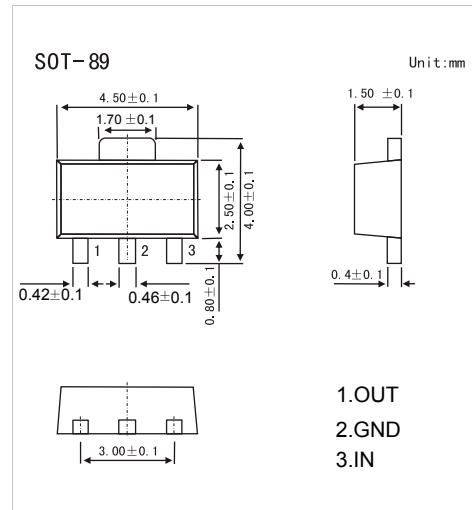

#### ■ Features

- Maximum Output current  $I_o$ : 0.1A
- Output Voltage  $V_o$ : 9V
- Continuous Total Dissipation  $P_d$ : 0.5W ( $T_a = 25^\circ\text{C}$ )


#### ■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	-55 ~ +125	°C
Storage Temperature Range	$T_{STG}$	-55 ~ +150	°C

#### ■ Electrical Characteristics ( $V_I=16\text{V}$ , $I_o=40\text{mA}$ , $C_I=0.33\text{ }\mu\text{F}$ , $C_O=0.1\text{ }\mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output Voltage	$V_o$	$T_J = 25^\circ\text{C}$	8.64	9.0	9.36	V
		$T_J = 0 \sim 125^\circ\text{C}$ , $12\text{V} \leq V_I \leq 24\text{V}$ , $I_o=1\text{mA} \sim 40\text{mA}$	8.55	9.0	9.45	V
		$T_J = 0 \sim 125^\circ\text{C}$ , $I_o=1\text{mA} \sim 70\text{mA}$	8.55	9.0	9.45	V
Load Regulation	$\Delta V_o$	$T_J = 25^\circ\text{C}$ , $I_o=1\text{mA} \sim 100\text{mA}$		19	90	mV
		$T_J = 25^\circ\text{C}$ , $I_o=1\text{mA} \sim 40\text{mA}$		11	40	mV
Line Regulation	$\Delta V_o$	$T_J = 25^\circ\text{C}$ , $12\text{V} \leq V_I \leq 24\text{V}$		45	175	mV
		$T_J = 25^\circ\text{C}$ , $13\text{V} \leq V_I \leq 24\text{V}$		40	125	mV
Quiescent Current	$I_Q$	$T_J = 25^\circ\text{C}$	4.1	6.0	mA	
Quiescent current Change	$\Delta I_Q$	$T_J = 0 \sim 125^\circ\text{C}$ , $13\text{V} \leq V_I \leq 24\text{V}$		1.5		mA
		$T_J = 0 \sim 125^\circ\text{C}$ , $1\text{mA} \leq I_o \leq 40\text{mA}$		0.1		
Output Noise Voltage	$V_N$	$T_J = 25^\circ\text{C}$ , $10\text{Hz} \leq f \leq 100\text{KHz}$	58			$\mu\text{V}$
Ripple Rejection	$RR$	$T_J = 0 \sim 125^\circ\text{C}$ , $15\text{V} \leq V_I \leq 25\text{V}$ , $f = 120\text{Hz}$	45			dB
Dropout Voltage	$V_D$	$T_J = 25^\circ\text{C}$		1.7		V






#### ■ Typical Application

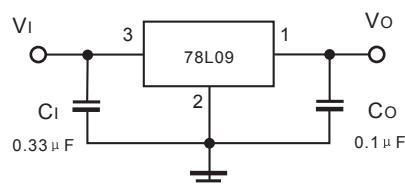

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# 78L09

## ■ Typical Characteristics

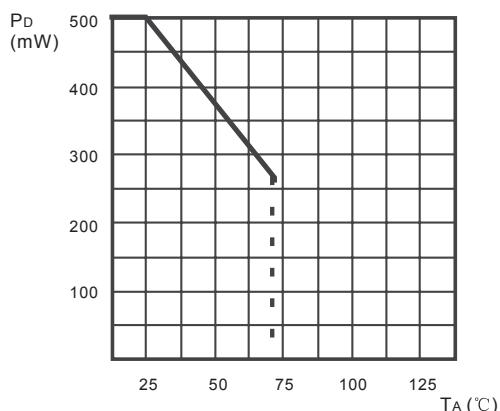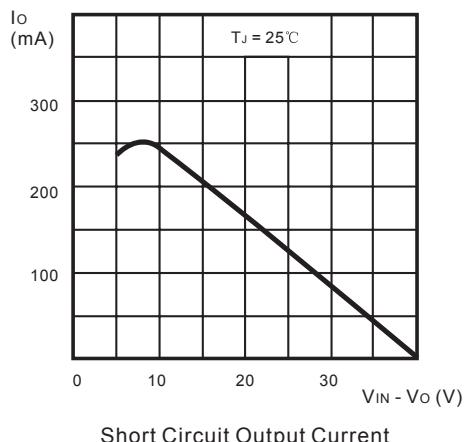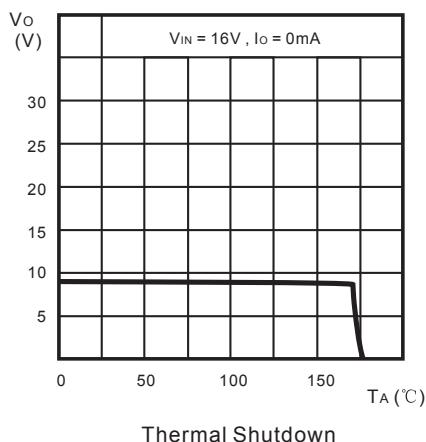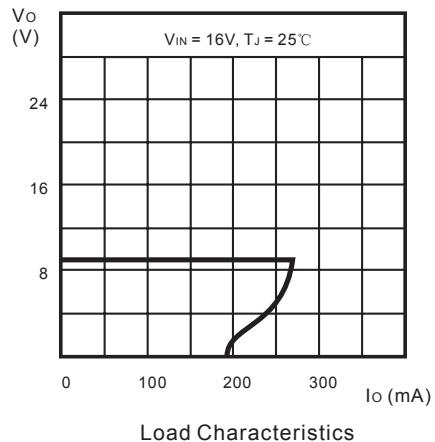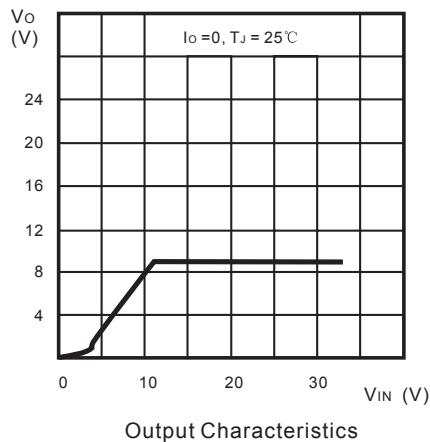

Power Dissipation vs. Ambient Temperature